

| RECORD 2E | | SPECIFICATION VDI 2198 | | | | | |
|-----------|----------------------------|------------------------|----------------------------------|------------------|----------------------------|------------------|------|
| | | BALKANCAR RECORD JSC | | | | | |
| 1 | Manufacturer | | | | | | |
| 2 | Type | | | GV 3786.30.5MC E | GV 3788.30.5MC E | GV 3792.30.5MC E | |
| 3 | Load capacity | Q | | kg | 2500 | 3000 | 3500 |
| 4 | Load center | C | Load center to fork face | mm | 500 | | |
| 5 | Drive unit | | Battery/diesel/LPG | | gas (LPG) / gasoline | | |
| 6 | Type of operation | | Pedestrian/rider seated/stand-on | | Rider seated | | |
| 7 | Overall dimensions | h_3 | Lift height | mm | 3000 ¹⁾ | | |
| 8 | | L_2 | Length | mm | 2610 | 2740 | |
| 9 | | B | Width | mm | 1200 | | |
| 10 | | h_6 | Height of overhead guard | mm | 2160 | | |
| 11 | Internal combustion engine | | Manufacturer, type (diesel/LPG) | | TOYOTA 4Y (LPG / gasoline) | | |
| 12 | Transmission | | Type | | Hydrodynamic | | |

1) For other lift heights refer to MAST table.

Size h_4 does not include a load backrest. When a backrest is fitted add + 680 mm.


* Forklifts in accordance with BDS ISO 3691-1.

* Other variants of specifications and characteristics are possible.

* Dimensions and parameters as shown are for reference only. They have been obtained under laboratory testing conditions.

They could vary in accordance with the operation mode and the corresponding variants.

* "Balkancar Record" JSC reserves the right to introduce changes to the specifications and products without notice.

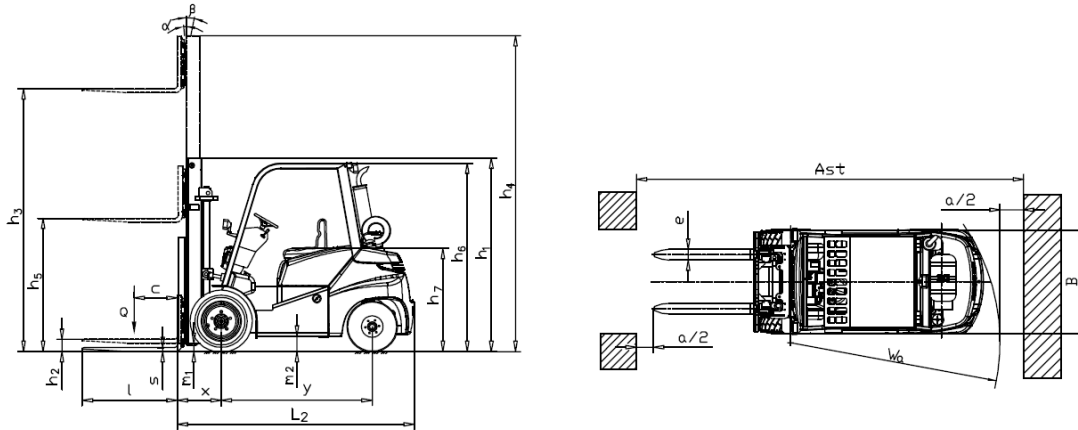

| MAST | | | | |
|------|-------------|----------------------|-----------------------|-----------|
| TYPE | LIFT HEIGHT | HEIGHT, MAST LOWERED | HEIGHT, MAST EXTENDED | FREE LIFT |
| | h_3 | h_1 | h_4 | h_2/h_5 |

SIMPLEX – 2,5 t FORKLIFT

(Two masts, Free lift)

| | | | | |
|------|------|------|------|----|
| 30 S | 3000 | 2100 | 3545 | 96 |
| 40 S | 4000 | 2590 | 4545 | 96 |

DUPLEX – 2,5 t FORKLIFT

(Two masts, Extended free lift)

| | | | | |
|------|------|------|------|------|
| 30 D | 3000 | 2100 | 3600 | 1500 |
|------|------|------|------|------|

TRIPLEX – 2,5 t FORKLIFT

(Three masts, Extended free lift)

| | | | | |
|------|------|------|------|------|
| 42 T | 4200 | 2100 | 4820 | 1480 |
| 45 T | 4500 | 2240 | 5240 | 1600 |
| 48 T | 4800 | 2310 | 5450 | 1660 |
| 52 T | 5200 | 2440 | 5840 | 1800 |
| 56 T | 5600 | 2590 | 6290 | 1940 |
| 64 T | 6400 | 2840 | 7040 | 2200 |

SIMPLEX – 3,0 - 3,5 t FORKLIFT

(Two masts, Free lift)

| | | | | |
|------|------|------|------|----|
| 30 S | 3000 | 2100 | 3545 | 96 |
| 40 S | 4000 | 2590 | 4545 | 96 |

DUPLEX – 3,0 - 3,5 t FORKLIFT

(Two masts, Extended free lift)

| | | | | |
|------|------|------|------|------|
| 30 D | 3000 | 2100 | 3630 | 1500 |
|------|------|------|------|------|

TRIPLEX – 3,0 - 3,5 t FORKLIFT

(Three masts, Extended free lift)

| | | | | |
|------|------|------|------|------|
| 42 T | 4200 | 2100 | 4915 | 1400 |
| 45 T | 4500 | 2240 | 5240 | 1520 |
| 48 T | 4800 | 2340 | 5540 | 1600 |
| 52 T | 5200 | 2490 | 5970 | 1740 |
| 56 T | 5600 | 2590 | 6315 | 1900 |
| 64 T | 6400 | 2840 | 7100 | 2140 |